

Specification

1. Item

Product	LPA for 380-400MHz
Partnumber	ELM-0380-39-40

2. Revision History

Issued / Revision	R&D Approved	Revision Detail
2023-06-07	YHL	Draft



Design	R & D	Approval
		
CYKIM		

Customer:	Date:	Part No.: ELM-0380-39-40
-----------	-------	--------------------------

General Specification


No.	Parameter	Specification	Unit
1	Operating Frequency Range	380~400MHz	20MHz BW
2	Operating Bandwidth	20MHz	-
3	Output Power Level	39dBm	10W
4	IMD	-65dBc min @ CW 2 Tone, 100KHz Spacing	39dBm (2 tone)
5	ALC Set Level	+39.5dBm typ.	-
6	ALC Range	10 min.	dB
7	Gain	40dB ± 1.0dB	-
8	Gain Flatness	± 0.5dB	-
9	Gain Variation with Temperature	± 1.0dB max	-
10	Input / Output VSWR	1.5 :1 (max.)	@With in Isolator
11	Harmonic	-40dBc Max	-
12	Supply Voltage	DC +27V	Volt
13	Supply Current	2.0A Typ / 2.5A Max.	A
14	Operating Temperature	-20°C ~ +60°C	Ambient temp.
15	Storage temperature range	-40°C ~ +85°C	-
16	Relative Humidity	0% ~ 90%	Non-condensing

Mechanical Specification

No.	Parameter	Specification	Unit
1	Dimension	180*150*28	W*D*H (mm)
2	Connector Type	SMA(F)	-
3	Pin Map (D-sub 9pin Male)	1. Over Power Alarm	Po=+41dBm±1dB / Shutdown High
		2. High Temp. Alarm	High (shut-down) / Low (Normal) Alarm & Shutdown : Higher than +90°C Auto Recovery : Lower than +70°C
		3. VSWR Alarm	High (Alarm) / Low (Normal) / 30dBm (Output Open)
		4. Temp. Monitor	Vo=(T / 100)+500mV
		5. LPA Status	High (Inactive), Low (Active)
		6. Loop Fail Alarm	High (shut-down) / Low (Normal)
		7. FWD Power Monitor	4.0V@Po=+39dBm, 0.1V/dB
		8. Enable/Disable	High (Disable) / Open & Low (Enable)
		9. GND	Ground
4	DC Fail Alarm (DC Fail Alarm function is integrated)	< 19V or >31V : Shutdown 21V~29V : Auto Recovery	-
5	Power Specification	3W3P Male Connector A1 : +27V, A2: GND, A3: NC	-

SOLUTION

■ Mechanical Dimension [Unit: mm]

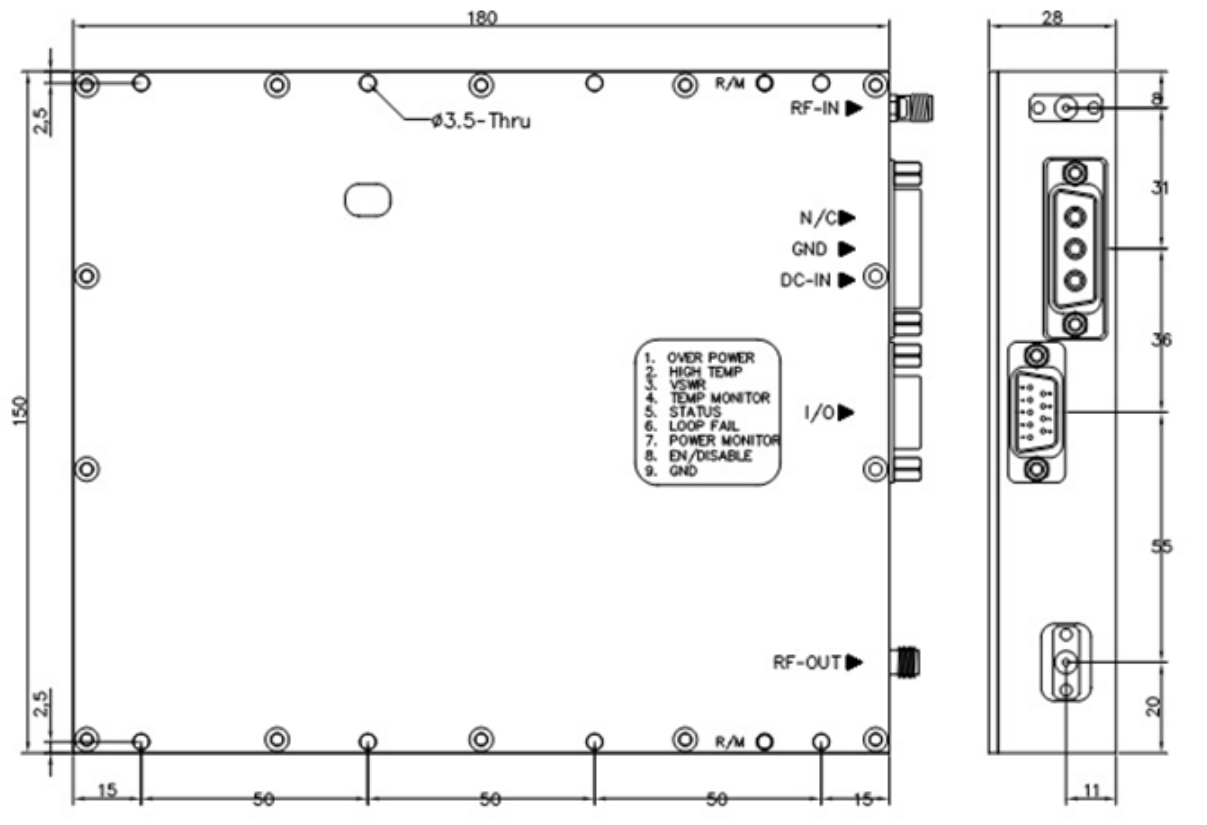

ECHO RF SOLUTION