


# Specification

## 1. Item

Product	1200~1600MHz 50W High Power Amplifier
Partnumber	EHM-1200-47-46

## 2. Revision History

Issued / Revision	R&D Approved	Revision Detail

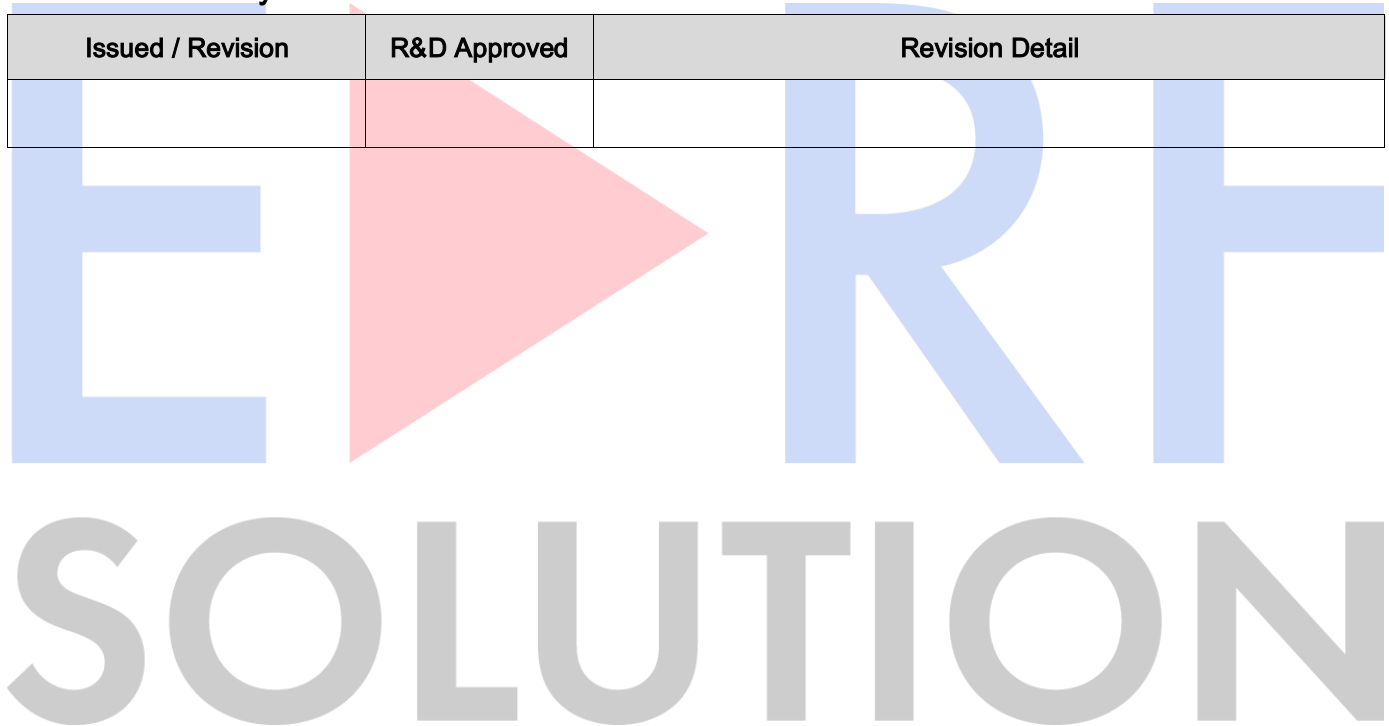

Design	R & D	Approval
		
CYKIM		

Customer:	Date:	Part No.: EHM-1200-47-46
-----------	-------	--------------------------

### General Specification

No.	Parameter	Specification	Unit
1	Operating Frequency Range	1200~1600MHz	-
2	Output Power(Psat)	60W typ.	-
3	Gain	45dB typ.	-
4	Gain Flatness	±3.0dB typ.	-
5	Max. Input Power	+3dBm	-
6	Input VSWR	1.5	-
7	ACPR@40dBm, 5MHz LTE PAR : 9.8dB@CCDF 0.01%	-30 typ.	-
8	Harmonics	-35dBc typ.	-
9	Spurious Signal	-60dBc	-
10	NF	18dB	-
11	EVM@40dBm	5%	-
12	Operating Voltage	28V	-
13	Current Draw@47dBm	7.5A max	-
14	Load VSWR	∞ : 1 VSWR	Built-in Isolator

### Mechanical Specification

No.	Parameter	Specification	Unit
1	Dimension	203.2*101.6*25.4	-
2	Weight	1.0kg	-
3	RF Connector	SMA Female	-
4	DC/Interface Connector	D-SUB 9Pin Male	-
5	Operating Case Temperature	-20 ~ +80°C	-
6	Storage Temperature	-40 ~ +90°C	-
7	Relative Humidity(Non-condensing)	5~95%	-

## Pin Description

Pin No.	Description	Specifications
1	Over Power Alarm	Alarm : TTL "High"@ >+48dBm
2	Reverse Power Alarm	Alarm : TTL "High"@ $\geq$ VSWR 3:1
3	High Temp. Alarm	Alarm : TTL "High"@ Temp. : $\geq$ +95°C Shutdown, Auto-restart @ +85°C
4	DC Fail Alarm	Alarm : TTL "High"@ $\leq$ +26V or $\geq$ +30V
5	Enable/Disable	Enable: TTL "Low", Disable: TTL "High"(3.3V) (Internally pull down)
6	Forward Power Monitor	Enable: TTL "Low", Disable: TTL "High"
7	Reverse Power Monitor	4.0 $\pm$ 0.1V@Po=+47dBm, Center Frequency 4.0 $\pm$ 0.15V@Po=+47dBm, Over Frequency
8	Temperature Monitor	3.0 $\pm$ 0.1V@Po=+37dBm, Center Frequency 3.0 $\pm$ 0.15V@Po=+37dBm, Over Frequency
9	GND	Ground
11,12,13	VDD	+28VDC
14,15	GND	Ground

**ECHO RF SOLUTION**

■ Mechanical Dimension [Unit: mm]



ECHO  
RF SOLUTION

ECHO  
RF SOLUTION